Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Product Brochure For B408

Metal Band Saw Blade - 10-14TPI Bi-Metal, Blade - 2362 x 19 x 0.80mm

Suits Stainless Steel

SUITS BS-7L - 7DS - 7LA Metal Cutting Band Saws



On Sale

Ex GST	Inc GST
~~$63.00~~	~~$69.30~~
$55.45	$61.00

ORDER CODE:	B408
Suits Band Saw Models:	BS-7L - 7DS - 7LA
Blade Size (L x W x T) (mm):	2362 x 19 x 0.80
Number of teeth per inch (TPI):	10-14
Blade Type:	BI-METAL
Blade Suitable for - Material Type:	Mild & Stainless Steel
Suits Section Size (mm):	0-10

Description

Please Note:
Starrett Blades are distributed in Sydney, Adelaide & Brisbane
Excision Blades are distributed in Melbourne & Perth

IMPORTANT RUN-IN INSTRUCTIONS FOR BI-METAL BLADES
- Avoid excessive feed pressure on run-in
- Run-in at 3/4 normal feed pressure for first 25 square inches on tough material
- After run-in, gradually increase feed to maximum cutting rate

Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au


BLADE SELECTION CHARTS

Band saw tooth size is determined by the size of the cross section to be cut. In general cutting thinner sections requires more teeth per inch, thicker sections require coarser pitches, or less teeth per inch.

To select an appropriate tooth size please refer to the table immediately below unless material to be cut is a tube, in which case refer to the larger table below. For general purpose cutting use a constant pitch blade, for more aggressive production cutting of harder to cut materials use a variable pitch blade.

SOLID SECTION

Section Size (mm)	Constant Pitch (TPI)	Variable Pitch (TPI)
Up to 10	24 or 18	14/18 or 10/14
10-15	14	8-12
16-30	10	6-10
31-50	8	5-8
51-80	6	4-6
81-120	4	3-4
121-200	3	2-3
Over 200	2 or 1.25	1.4-2 or 0.8-1.3

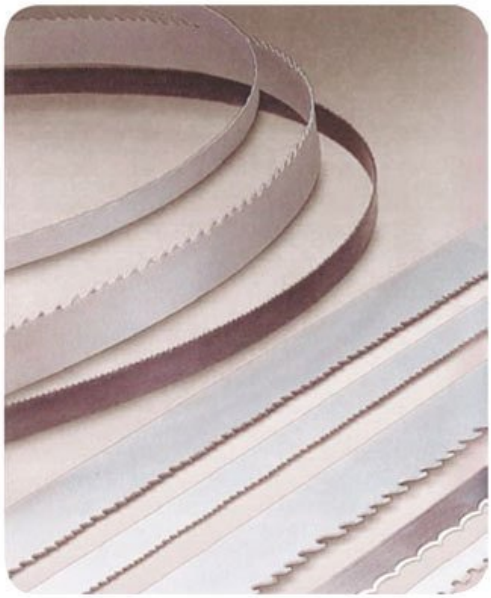

TUBE SECTION

Wall Thickness (mm)	Outside diameter of tube or maximum profile section length (mm)												
	20	40	60	80	100	120	150	200	300	500	600	700	800
2	14	14	14	14	14	14	10-14	10-14	8-12	8-12	6-10	5-8	5-8
3	14	14	10-14	10-14	10-14	10-14	8-12	8-12	6-10	6-10	5-8	5-8	5-8
4	14	14	10-14	10-14	8-12	8-12	6-10	6-10	5-8	5-8	4-6	4-6	4-6
5	14	10-14	10-14	8-12	8-12	6-10	6-10	5-8	5-8	4-6	4-6	4-6	4-6
6	14	10-14	10-14	8-12	8-12	6-10	6-10	5-8	5-8	4-6	4-6	3-4	3-4
8	14	10-14	8-12	8-12	6-10	6-10	5-8	5-8	4-6	4-6	3-4	3-4	3-4
10		8-12	8-12	6-10	6-10	5-8	5-8	4-6	4-6	3-4	3-4	3-4	3-4
12		8-12	6-10	6-10	5-8	5-8	4-6	4-6	3-4	3-4	3-4	3-4	2-3
15			6-10	5-8	5-8	4-6	4-6	4-6	3-4	3-4	3-4	2-3	2-3
20				5-8	4-6	4-6	4-6	3-4	3-4	2-3	2-3	2-3	2-3
30					4-6	4-6	3-4	3-4	3-4	2-3	2-3	2-3	2-3
50						3-4	3-4	3-4	2-3	2-3	2-3	2-3	2-3
75							2-3	2-3	2-3	2-3	2-3	1.4-2	1.4-2