Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au


Product Brochure For C070

2MT Live Centre

6000rpm, 340kg Load Capacity



ORDER CODE:	C070
Taper (MT):	2MT
Point Type:	Standard
Maximum Speed (rpm):	6000
Maximum Load Capacity (kg):	340
Angle ? (deg):	~
A (mm):	~
B (mm):	36
C:	~
D:	~
D1:	~
d:	~
E (mm):	~
F (mm):	~
G (mm):	22
L (mm):	125
Nett Weight (kg):	0.34

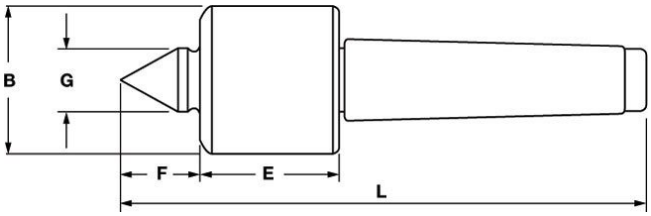

ŠKODA

1 YEAR WARRANTY

Description

60º Point Angle

Features

- Designed with a maximum run-out tolerance of 0.0035mm
- Can be used for all lathe and grinding applications
- An adjustable front radial bearing allows for elimination of excessive run out
- The design features a small-diameter body which allows for closer access to the work piece
- Morse tapers are to standards DIN 228 and ISO 296