

Product Brochure For C145

Chain Block - HS-S 2T3M

2 Tonne x 3 Metre



Description

Our 2-tonne, 3-metre Manual Chain Block is designed for reliable lifting performance across workshops, warehouses, construction sites, and maintenance environments. Built with a focus on durability and user confidence, it delivers smooth, controlled lifting operations while maintaining consistent load stability.

This unit is engineered to handle demanding day-to-day tasks, offering dependable operation whether used for equipment positioning, load handling, or general lifting requirements. Its compact design makes it easy to set up, transport, and operate in a wide range of applications, ensuring versatility without compromising on strength.

Developed for professionals who need a trustworthy lifting solution, this chain block reflects a balance of robust construction and practical usability, making it a staple tool for safe and efficient lifting.

Features

- Heavy-duty steel cast body with an impact-resistant gear case and reinforced side covers
- Precision-engineered bottom hooks featuring ball bearings and secure safety latches
- Fitted with stainless steel HAFCO ID plates and rivets to prevent sparking in sensitive environments
- Each HAFCO Chain Block carries an individual serial number linked directly to its test certificate
- Features
- Suitable for use in underground mining and heavy-duty applications with no aluminum components
- Fully Enclosed Gear and Brake System – Provides maximum protection from dust, debris, and weather, ensuring long service life.
- Small Headroom Design – Optimised for lifting in confined spaces and low-clearance environments
- Precise Chain Guide System – Patented design for smooth,

New Release


Ex GST

\$170.00

Inc GST

\$187.00

ORDER CODE:	C145
MODEL:	HS-S 2T 3M
Lift Capacity (kg / Tonne):	2000 / 2
Lift Height (Metre):	3
Weight (kg):	19.5

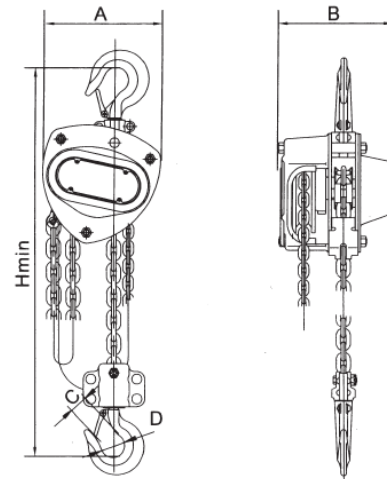

MODEL	HCB1T3M	HCB1T6M	HCB2T3M
Capacity (kg)	1000	1000	2000
Standards Lift (m)	3	6	3
No. of Load Chain Falls	1	1	1
Load Chain Dia. (mm)	6*18	6*18	8*24
Effort required to lift Max. Load (N)	280	280	360
Dimensions (mm)	A (mm)	127	127
	B (mm)	103	103
	C (mm)	32	32
	D (mm)	42.5	42.5
	Hmin (mm)	310	310
Nett Weight (kg)	7.3	10.66	14.9

Product Brochure For C145

- reliable chain movement and reduced risk of jamming.
- Fitted with Grade 80 calibrated lifting chain
- QR Code scan for quick manual specifications
- Rated working load capacity: 2T with 3M chain drop
- Complies to AS 1418.2

Specific Features



Front View



Side View



Top Hook



Lifting Hook

Recommended Accessories

H310

Round Sling

H314

Round Sling

H322

Flat Sling

H312

Round Sling



Product Brochure For C145

H324
Flat Sling



C148
Girder Trolley



C188
Mobile Girder Rail Gantry



K088
Mobile Girder Rail Gantry
Package Deal



K090
Mobile Girder Rail Gantry
Package Deal



C195
Forklift Jib Attachment



H352
13mm 2T Grade S - Lifting Bow
Shackle



H331
Self Locking Swivel Hook

