Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Product Brochure For C195

Forklift Jib Attachment - FLA-2T-2G


WLL 2 Tonne Capacity


On Sale - New Release


Ex GST	Inc GST
~~$320.00~~	~~$352.00~~
$290.00	$319.00



ORDER CODE:	C195
Lifting Capacity (WLL) (Tonne):	2
Width (mm):	625
Safety Chain Length (mm):	1500
Fork Pocket Size (mm):	180 x 80
Fork Pocket Centre (mm):	445
Horizontal Centre of Gravity (HCG) (mm):	312.5 forward from the back edge of the jib
Vertical Centre of Gravity (VCG) (mm):	62
Swivel Hook with Safety Latch (Yes / No):	Yes
Standard (No.):	AS 2359.1
Nett Weight (kg):	25.5

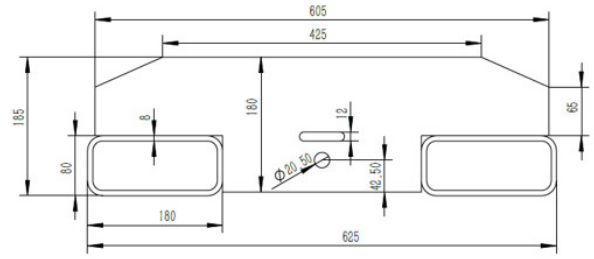

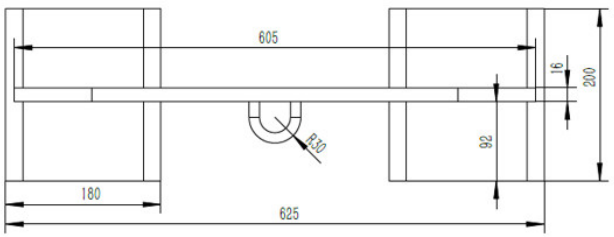



Description

The FLA-2T Forklift Jib Attachment effectively converts a standard forklift into a versatile mobile crane, enabling operators to lift and manoeuvre awkward or oversized loads that cannot be safely handled with conventional forklift tines. Engineered with an excellent strength-to-weight ratio, this heavy-duty attachment is supplied complete with a safety hook, shackle and safety chain for secure and reliable operation.

The FLA-2T-2G is rated at a Working Load Limit (WLL) of 2 tonne (2000 kg) when correctly positioned and secured on the forklift tines, with the load point located 600 mm from the forklift mast and the safety chain fully attached.

Important:
In accordance with AS 2359.1, forklifts must be de-rated by 20% when using lifting attachments. Ensure the forklift used has a minimum rated capacity of 2.5 tonne before deration to safely support the 2 tonne WLL of this jib attachment -

Features

- Transforms a standard forklift into a versatile mobile crane, ideal for lifting oversized or awkward loads
- Heavy-duty steel construction with excellent strength-to-weight ratio
- Slip-on attachment and safety chain allows quick connection to a forklift
- Hot-dip galvanised finish for superior corrosion resistance and long-lasting durability
- Precision-designed fork pockets for secure and stable engagement
- Supplied complete with Grade 80 swivel safety hook & Safety bow shackle
- Grade 80 Long Link 1.5M Safety chain with bow shackle
- Rated WLL 2 tonne (2000 kg)
- Each attachment is individually serialised and visually inspected

and tested
- Designed in accordance with AS 2359.1

Specific Features



Swivel Hook



Tine Opening



Rear View



Front View



Side View



Top View



Top Front View 2



Top Front View 3



Right View



Shown Attached on Forklift



Shown Attached on Forklift 2



Shown Attached on Forklift 3



1500mm Safety Chain Shown on Forklift

Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Recommended Accessories

H300
Round Sling



H316
Flat Sling



H305
Round Sling



H318
Flat Sling



H308
Round Sling



H307
Round Sling



H320
Flat Sling



H310
Round Sling



Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Product Brochure For C195

H314
Round Sling



H322
Flat Sling



H312
Round Sling



H324
Flat Sling

