Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Product Brochure For C196

Forklift Bulk Bag Attachment 2Tonne - HFBA-2T

WLL 2 Tonne Capacity



ORDER CODE:	C196
Lifting Capacity (WLL) (Tonne):	2
Width (mm):	950
Safety Chain Length (mm):	1200
Fork Pocket Size (mm):	180 x 80
Fork Pocket Centre (mm):	355
Horizontal Centre of Gravity (HCG) (mm):	450
Vertical Centre of Gravity (VCG) (mm):	450
Swivel Hook with Safety Latch (Yes / No):	Yes
Standard (No.):	AS 2359.1
Nett Weight (kg):	85

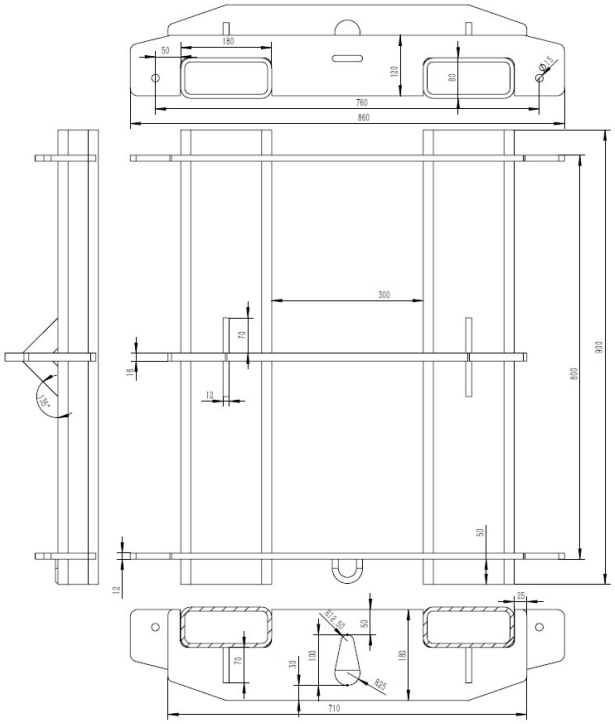

Description

The Forklift Bulk Bag Attachment is designed to provide a safe and efficient solution for lifting, handling and manoeuvring bulk bags using a standard forklift. Designed to support bulk bag handling operations, the attachment features a robust steel construction with multiple lifting hooks to securely support bulk bags during lifting, transport and positioning.

Engineered for heavy-duty industrial use, the attachment is designed to distribute the load across multiple lifting points, providing a practical and versatile solution for handling bulk bags in warehouses, workshops, manufacturing facilities, agricultural operations and other industrial environments.

The attachment is designed to be positioned and secured onto the forklift tines, with the fork pockets providing a secure mounting interface during operation. Operators must ensure the attachment is correctly fitted, secured and used within its rated Working Load Limit (WLL), and that the forklift's capacity is suitable for the combined load and attachment configuration.

Important:
In accordance with AS 2359.1, forklifts must be de-rated by 20% when using lifting attachments. Ensure the forklift used has a minimum rated capacity of 2.5 tonne before deration to safely support the 2 tonne WLL of this jib attachment -

Features

- Transforms a standard forklift into a versatile mobile crane, ideal for lifting bulk bags
- Heavy-duty steel construction with excellent strength-to-weight ratio
- Slip-on attachment and safety chain allows quick connection to a forklift
- Hot-dip galvanised finish for superior corrosion resistance and long-

lasting durability
- Precision-designed fork pockets for secure and stable engagement
- Supplied complete with Grade 80 swivel safety hooks & Safety bow shackles
- Grade 80 Long Link 1.2M Safety chain with bow shackle
- Rated WLL 2 tonne (2000 kg)
- Each attachment is individually serialised and visually inspected and tested
- Designed in accordance with AS 2359.1

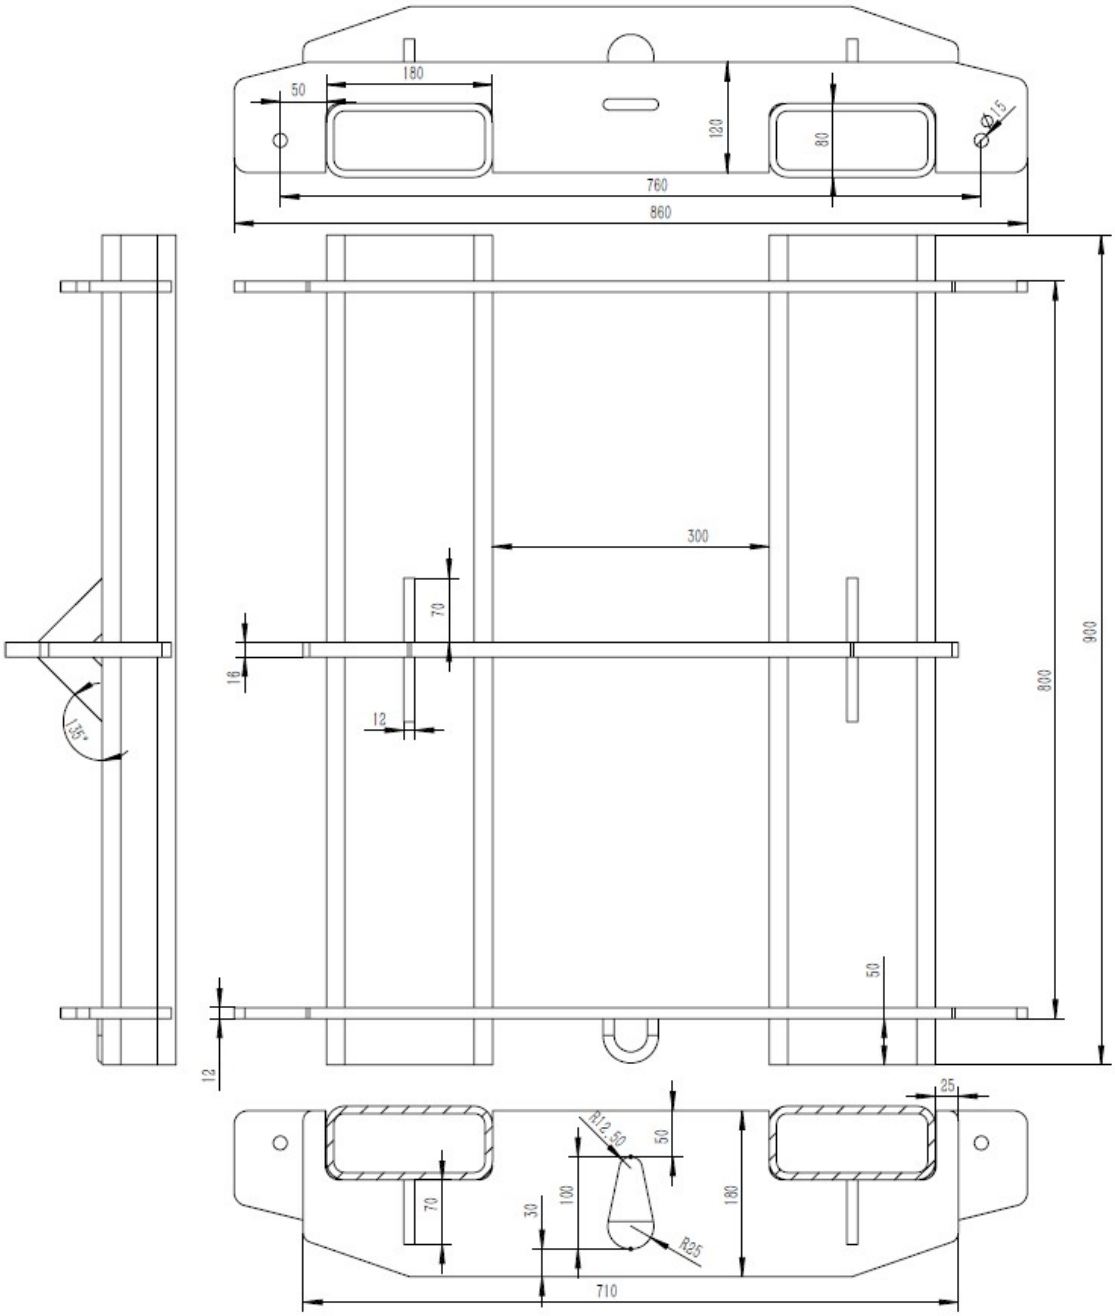

Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Recommended Accessories

H300
Round Sling



H316
Flat Sling



H305
Round Sling



H318
Flat Sling



H308
Round Sling



H307
Round Sling



H320
Flat Sling



H310
Round Sling



Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Product Brochure For C196

H314
Round Sling



H322
Flat Sling



H312
Round Sling



H324
Flat Sling

