

Product Brochure For D739

1500mm Easson Digital Readout Scale

VS20 Standard Scale
 5µm Resolution



Ex GST
 \$500.00

Inc GST
 \$550.00

ORDER CODE:	D739
MODEL:	-
Type:	VS20 Standard Scale
Travel - Maximum (mm):	1500
Overall Length (L) (mm):	1646
Scale Resolution (µm):	5
Grating Pitch:	-
Accuracy (µm):	±10
Output Signal:	-
Connector:	-
Cable Length (Metre):	5
Working Temperature (°C):	-
Sealing Protection Class:	-
Maximum Speed (M/min):	-
Reference Point:	-
Width x Height (W x H) (mm):	27.5 x 40.1
Backing Support Plate (Yes / No):	No

EASSON




Description

Easson VS series Glass Grating Linear Transducer: EASSON - Always committed to Quality, Technology & Innovation

Features

- **DOUBLE SEAL DESIGNED SCALES:**
- The plastic seals of the transducer use an innovative material to offer superior oil resistance, high elastic recovery properties and durability, carefully designed lip geometry offer low slide resistance.
- **100% LASER CALIBRATION:**
- All glass grating transducers are individually inspected and calibrated by our in-house laser calibrator to ensure accuracy complies 100% with the specifications.
- **ADVANCED OPTICAL MEASURING SYSTEM:**
- The slide carrier of the VS series scales, use a five bearing design for optical grating linear transducer which has been proven as the most reliable system design in today's market.
- The glass grating slide-ways are lapped, and JIS standard P5 grade bearings are used to achieve smooth and accurate movement and long working life.
- **D.I.Y. INSTALLATION:**
- An easy-to-follow D.I.Y. Installation Manual is supplied with each system, complete with illustrations and mounting brackets.

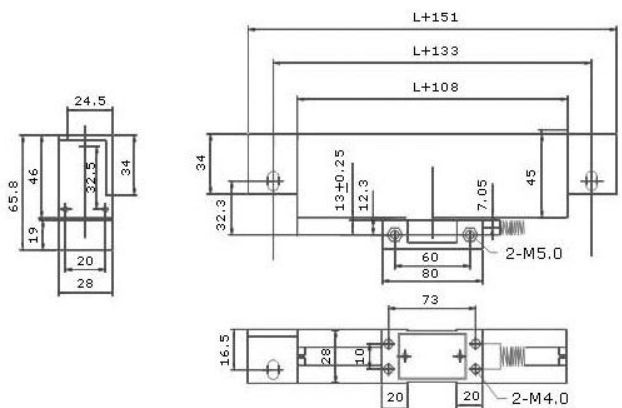


GS20 Series from 1300mm to 3000mm

Product Brochure For D739

MODEL		VS 10	
Measuring Standard	Glass scale - Grating		
Optical Detecting System	Transmissive Infrared S		
Slide Carrier System	Vertical five bearing supporting system	45° t suppo	
Resolution	5μm		
Measurement Travel (100-1200mm)	Every 50mm per length specification		
Measurement Travel (1300-3000mm)	-	Every length	
Accuracy (100-450mm) Accuracy (500-1000mm) Accuracy (1050-1250mm) Accuracy (1300-3000mm)	±3 - ±5μm ±10μm ±10μm -		
Repeatability	2μm		
Hystersis	3μm		
Protection	DIN-		
Power Supply	DC		
Output Signals			


Product Brochure For D739

Specific Features



DSUB9 Male Plug

Dsub 9
9 pin male connector plug



Pin	TTL Signal	Cable	422A Signal	Color
1	—	—	A	Yellow
2	0V	Orange	0V	White
3	—	—	B	Red
4	Grnd	Ground	Grnd	Ground
5	—	—	R	Black
6	A	Yellow	A	Green
7	5V	Red	5V	Brown
8	B	Green	B	Blue
9	R	Brown	R	Gray

Dsub9 Wiring Diagram



DIY Installation



Parts



Close Up

Recommended Accessories

D709

Easson Scales - Extension Cable



D710

Easson Scales - Extension Cable



D772

Digital Readout Scale Mounting Bracket Kit



D711

Adaptor Cable



Product Brochure For D739

D712

Adaptor Cable

