

Product Brochure For D746

2400mm Easson Digital Readout Scale

VS20 Standard Scale
 5µm Resolution



Ex GST
\$1,450.00

Inc GST
\$1,595.00

ORDER CODE:	D746
MODEL:	-
Type:	VS20 Standard Scale
Travel - Maximum (mm):	2400
Overall Length (L) (mm):	2546
Scale Resolution (µm):	5
Grating Pitch:	-
Accuracy (µm):	±10
Output Signal:	-
Connector:	-
Cable Length (Metre):	9
Working Temperature (°C):	-
Sealing Protection Class:	-
Maximum Speed (M/min):	-
Reference Point:	-
Width x Height (W x H) (mm):	27.5 x 40.1
Backing Support Plate (Yes / No):	No

EASSON




Description

Easson VS series Glass Grating Linear Transducer: EASSON - Always committed to Quality, Technology & Innovation

Features

- **DOUBLE SEAL DESIGNED SCALES:**
- The plastic seals of the transducer use an innovative material to offer superior oil resistance, high elastic recovery properties and durability, carefully designed lip geometry offer low slide resistance.
- **100% LASER CALIBRATION:**
- All glass grating transducers are individually inspected and calibrated by our in-house laser calibrator to ensure accuracy complies 100% with the specifications.
- **ADVANCED OPTICAL MEASURING SYSTEM:**
- The slide carrier of the VS series scales, use a five bearing design for optical grating linear transducer which has been proven as the most reliable system design in today's market.
- The glass grating slide-ways are lapped, and JIS standard P5 grade bearings are used to achieve smooth and accurate movement and long working life.
- **D.I.Y. INSTALLATION:**
- An easy-to-follow D.I.Y. Installation Manual is supplied with each system, complete with illustrations and mounting brackets.

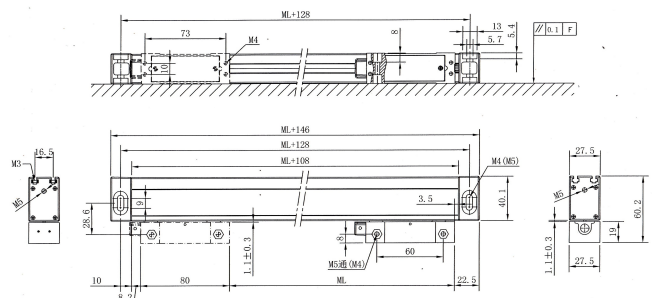


Product Brochure For D746

MODEL		VS 10	
Measuring Standard	Glass scale - Grating		
Optical Detecting System	Transmissive Infrared S		
Slide Carrier System	Vertical five bearing supporting system	45° t suppo	
Resolution	5μm		
Measurement Travel (100-1200mm)	Every 50mm per length specification		
Measurement Travel (1300-3000mm)	-	Every length	
Accuracy (100-450mm) Accuracy (500-1000mm) Accuracy (1050-1250mm) Accuracy (1300-3000mm)	±3 - ±5μm ±10μm ±10μm -		
Repeatability	2μm		
Hystersis	3μm		
Protection	DIN-		
Power Supply	DC		
Output Signals			


Product Brochure For D746

Specific Features



DSUB9 Male Plug

Dsub 9
9 pin male connector plug



Pin	TTL Signal	Cable	422A Signal	Cable
1	—	—	A	Yellow
2	0V	Orange	0V	White
3	—	—	B	Red
4	Grnd	Ground	Grnd	Ground
5	—	—	R	Black
6	A	Yellow	A	Green
7	5V	Red	5V	Brown
8	B	Green	B	Blue
9	R	Brown	R	Gray

Dsub9 Wiring Diagram



DIY Installation



Parts



Close Up

Recommended Accessories

D709

Easson Scales - Extension Cable



D710

Easson Scales - Extension Cable



D772

Digital Readout Scale Mounting Bracket Kit



D711

Adaptor Cable



Product Brochure For D746

D712

Adaptor Cable

