


Product Brochure For P982

Industrial CNC Plasma Cutting Table - BPL-H

Range 2200 x 6400 ~ 4200 x 28800mm

Please Refer to Table for Specifications

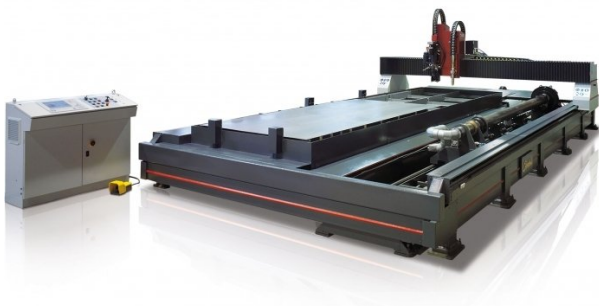

ORDER CODE:	P982
MODEL:	BPL-H
Cutting Capacity - Mild Steel (mm):	~
Cutting Table Capacity (mm):	Refer Table Below
Plasma Cutting Unit:	~
Current Output (amp):	~
Duty Cycle (Typical):	~
Fume Management (Type):	~
Cutting Gas (Type):	~
Plasma Unit Input Voltage (V):	~
Machine Input voltage:	~
Plasma Unit Input Amperage (amp):	~
Nett Weight (kg):	2200



Description

The all rounder designed for most medium fabrication shops and small service centres to large production plants. It can carry plasmas from 50-400 amps up to 4 tool carriages and a total of 8 oxy cut torches.

MULTI PROCESS APPLICATIONS

BPL-H machine with its special designed bridge construction have unlimited feature as multitorch and multi process application. With that option customers are free for any application requested.

With Specially designed side slide carrier system, prevent distortion effects and keep accuracy also for very long machine rails. Slide Carrier gives trouble free Oxy-fuel cutting up to 300 mm and allows machine length up to 60 meters and more.


Features

- DESIGN AND OPERATING FEATURES
- Availability of multi torch applications.
- Suitable for Oxy-fuel cutting up to 300 mm
- Best combination of Precision and very thick process machine.
- High precision plasma cutting technology
- High mechanical accuracy to: ± 0.1 mm
- Axis positioning speed: 30 m/min
- X and Y axis travel on precision linear rail guides
- Torch-height travel with hardened ballscrews on dual linear guides
- Fast and accurate positioning with AC brushless servo motors:
- Y-axis: dual synchronised servo drives
- X-axis: single servo drive
- Cutting table independently constructed of bridge and machine frame to maintain positional accuracy under any table-load
- Patented crash protection on torch®
- Automatic torch height control
- Sectional cutting table with automatic fume extraction system
- Windows® based CNC unit
- Automatic nesting software

Optional Accessories

- Dust and fume collector devices conforming to safety regulations

Product Brochure For P982

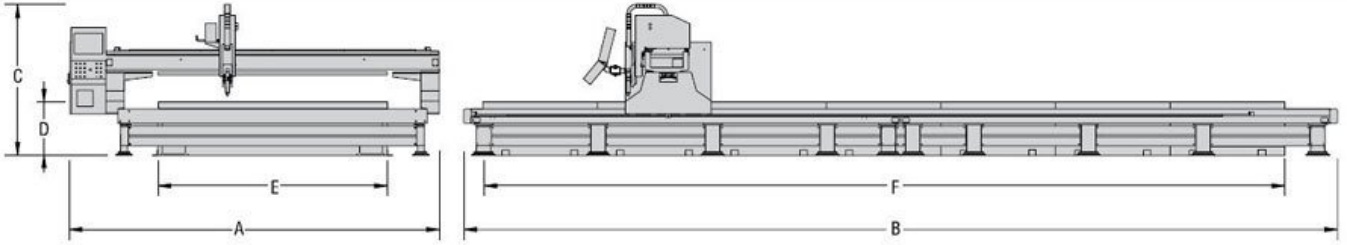

TIPLER TYPES	Kesme Tablası Cutting Table (mm)	Genişlik Width (A) (mm)	Uzunluk Lenght (B) (mm)	Yükseklik Height (C) (mm)	Tabla Yüksekliği Table Height (D) (mm)	Tabla Eni Table Width (mm)	Tabla boyu Table Lenght (mm)	X Eksen Strok X Axis Stroke (E) (mm)	Y Eksen Strok Y Axis Stroke (F) (mm)	Ağırlık Weight (kg)
BPL-H2006_RO	2200 x 6400	4250	8200	2200	750	2200	6400	2800	6200	8000
BPL-H2008_RO	2200 x 8800	4250	10200	2200	750	2200	8800	2800	8200	8500
BPL-H2010_RO	2200 x 11200	4250	12200	2200	750	2200	11200	2800	10200	11000
BPL-H2012_RO	2200 x 12800	4250	14200	2200	750	2200	12800	2800	12200	13000
BPL-H2014_RO	2200 x 14400	4250	16200	2200	750	2200	14400	2800	14200	15000
BPL-H2016_RO	2200 x 16800	4250	18200	2200	750	2200	16800	2800	16200	17000
BPL-H2018_RO	2200 x 19200	4250	20200	2200	750	2200	19200	2800	18200	19000
BPL-H2020_RO	2200 x 20800	4250	22200	2200	750	2200	20800	2800	20200	21000
BPL-H2022_RO	2200 x 22400	4250	24200	2200	750	2200	22400	2800	22200	23000
BPL-H2024_RO	2200 x 24800	4250	26200	2200	750	2200	25600	2800	24200	25000
BPL-H2026_RO	2200 x 27200	4250	28200	2200	750	2200	27200	2800	26200	27000
BPL-H2028_RO	2200 x 28800	4250	30200	2200	750	2200	28800	2800	28200	29000
BPL-H2506_RO	2700 x 6400	4750	8200	2200	750	2700	6400	3300	6200	9000
BPL-H2508_RO	2700 x 8800	4750	10200	2200	750	2700	8800	3300	8200	9500
BPL-H2510_RO	2700 x 11200	4750	12200	2200	750	2700	11200	3300	10200	12000
BPL-H2512_RO	2700 x 12800	4750	14200	2200	750	2700	12800	3300	12200	14000
BPL-H2514_RO	2700 x 14400	4750	16200	2200	750	2700	14400	3300	14200	16000
BPL-H2516_RO	2700 x 16800	4750	18200	2200	750	2700	16800	3300	16200	18000
BPL-H2518_RO	2700 x 19200	4750	20200	2200	750	2700	19200	3300	18200	20000
BPL-H2520_RO	2700 x 20800	4750	22200	2200	750	2700	20800	3300	20200	22000
BPL-H2522_RO	2700 x 22400	4750	24200	2200	750	2700	22400	3300	22200	24000
BPL-H2524_RO	2700 x 24800	4750	26200	2200	750	2700	25600	3300	24200	26000
BPL-H2526_RO	2700 x 27200	4750	28200	2200	750	2700	27200	3300	26200	28000
BPL-H2528_RO	2700 x 28800	4750	30200	2200	750	2700	28800	3300	28200	30000
BPL-H3006_RO	3200 x 6400	5250	8200	2200	750	3200	6400	3800	6200	10000
BPL-H3008_RO	3200 x 8800	5250	10200	2200	750	3200	8800	3800	8200	10500
BPL-H3010_RO	3200 x 11200	5250	12200	2200	750	3200	11200	3800	10200	13000
BPL-H3012_RO	3200 x 12800	5250	14200	2200	750	3200	12800	3800	12200	15000
BPL-H3014_RO	3200 x 14400	5250	16200	2200	750	3200	14400	3800	14200	17000
BPL-H3016_RO	3200 x 16800	5250	18200	2200	750	3200	16800	3800	16200	19000
BPL-H3018_RO	3200 x 19200	5250	20200	2200	750	3200	19200	3800	18200	21000
BPL-H3020_RO	3200 x 20800	5250	22200	2200	750	3200	20800	3800	20200	23000
BPL-H3022_RO	3200 x 22400	5250	24200	2200	750	3200	22400	3800	22200	25000
BPL-H3024_RO	3200 x 24800	5250	26200	2200	750	3200	25600	3800	24200	27000
BPL-H3026_RO	3200 x 27200	5250	28200	2200	750	3200	27200	3800	26200	29000
BPL-H3028_RO	3200 x 28800	5250	30200	2200	750	3200	28800	3800	28200	31000
BPL-H3506_RO	3200 x 6400	5750	8200	2200	750	3700	6400	4300	6200	11000
BPL-H3508_RO	3700 x 8800	5750	10200	2200	750	3700	8800	4300	8200	11500
BPL-H3510_RO	3700 x 11200	5750	12200	2200	750	3700	11200	4300	10200	14000
BPL-H3512_RO	3700 x 12800	5750	14200	2200	750	3700	12800	4300	12200	16000
BPL-H3514_RO	3700 x 14400	5750	16200	2200	750	3700	14400	4300	14200	18000
BPL-H3516_RO	3700 x 16800	5750	18200	2200	750	3700	16800	4300	16200	20000
BPL-H3518_RO	3700 x 19200	5750	20200	2200	750	3700	19200	4300	18200	22000
BPL-H3520_RO	3700 x 20800	5750	22200	2200	750	3700	20800	4300	20200	24000
BPL-H3522_RO	3700 x 22400	5750	24200	2200	750	3700	22400	4300	22200	26000
BPL-H3524_RO	3700 x 24800	5750	26200	2200	750	3700	25600	4300	24200	28000
BPL-H3526_RO	3700 x 27200	5750	28200	2200	750	3700	27200	4300	26200	30000
BPL-H3528_RO	3700 x 28800	5750	30200	2200	750	3700	28800	4300	28200	32000
BPL-H4006_RO	4200 x 6400	6250	8200	2200	750	4200	6400	4800	6200	12000
BPL-H4008_RO	4200 x 8800	6250	10200	2200	750	4200	8800	4800	8200	12500
BPL-H4010_RO	4200 x 11200	6250	12200	2200	750	4200	11200	4800	10200	15000
BPL-H4012_RO	4200 x 12800	6250	14200	2200	750	4200	12800	4800	12200	17000
BPL-H4014_RO	4200 x 14400	6250	16200	2200	750	4200	14400	4800	14200	19000
BPL-H4016_RO	4200 x 16800	6250	18200	2200	750	4200	16800	4800	16200	21000
BPL-H4018_RO	4200 x 19200	6250	20200	2200	750	4200	19200	4800	18200	23000
BPL-H4020_RO	4200 x 20800	6250	22200	2200	750	4200	20800	4800	20200	25000
BPL-H4022_RO	4200 x 22400	6250	24200	2200	750	4200	22400	4800	22200	27000
BPL-H4024_RO	4200 x 24800	6250	26200	2200	750	4200	25600	4800	24200	29000
BPL-H4026_RO	4200 x 27200	6250	28200	2200	750	4200	27200	4800	26200	31000
BPL-H4028_RO	4200 x 28800	6250	30200	2200	750	4200	28800	4800	28200	33000

Verilen değerler tekli torch içindir. İki veya daha fazla torch için bilgi alınız. * Data in the table are for single torch. Please ask for double or more torch.

Product Brochure For P982

Recommended Accessories

P799

Plasma Water Table Fluid

