

Product Brochure For S720

Lockseamer - OZ-20

0.4 - 0.9mm Mild Steel Capacity



ORDER CODE:	S720
MODEL:	OZ-20
Capacity - Mild Steel (mm):	0.4 - 0.9
Stations (No.):	5
Work Height Pittsburgh (mm):	870
Work Height - Power Flanger (mm):	1125
Motor Power (kW / hp):	1.1 / 1.5
Voltage / Amperage (V / amp):	240 / 15
Machine Dimensions (L x W x H) (mm):	1040 x 420 x 1120
Nett Weight (kg):	161


OZ FORM




Features

- GENERAL FEATURES OF OZ-FORM-16 and OZFORM-20
- Pittsburgh rolls are supplied as standard
- OzForm-20 is supplied with Power Flanger as standard
- Extended shafts for optional rolls such as Double Seam and Right Angle Flange
- Positive lubrication to all moving parts through grease nipples and oil holes
- Reinforced steel plate stand provides rigidity which eliminates drumming
- Hardened material guides
- Forming speed 5m/min maximum
- Made in Australia
- Mild steel capacity is rated on hot rolled material with 250MPA

Product Brochure For S720

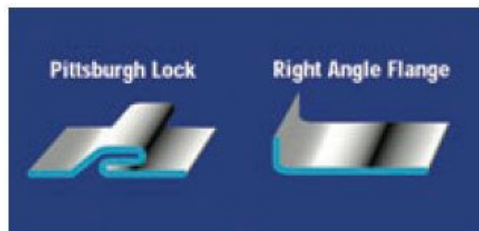

OZ-20 Includes: Pittsburgh Rolls & Flanger

	Rolls & Flange	Capacity	Material used	Size
	Pittsburgh Lock Rolls 8mm Pocket	0.4 - 0.9mm	25mm	8mm pocket
	Right Angle Flange (standard)	0.4 - 0.9mm	6mm	5mm high

Optional Rolls to suit:

	Rolls	Capacity	Material used	Size
	Double Seam Rolls (Type S)	0.4 - 0.9mm OZ-20 0.9 - 1.6mm OZ-16	25mm	10mm seam
	Drive Cleat Rolls	0.4 - 0.9mm OZ-20 0.9 - 1.6mm OZ-16	25mm	28mm wide