Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Product Brochure For S802

Motorised Plate Curving Rolls - PR-133A

1300 x 2.5mm Mild Steel Capacity

Motorised Up/Down Rear Roll, DRO Control Panel & Initial Pinch Design



On Sale

Ex GST	Inc GST
~~$5,290.00~~	~~$5,819.00~~
$5,090.00	$5,599.00

ORDER CODE:	S802
MODEL:	PR-133A
Curving System Type:	Initial Pinch
Curving Material Length (mm):	1300
Curving Plate Thickness - Mild Steel (mm):	2.5
Minimum Rolling Diameter (mm):	135
Roll Diameter (mm):	90
Motor Power (kW / hp):	1.1 / 1.5
Voltage / Amperage (V / amp):	415
Dimensions (LxWxH) (mm):	1800 x 640 x 1000
Floor Space (L x W x H) (mm):	1855 x 1030 x 1000
Nett Weight (kg):	645

METALMASTER

1 YEAR WARRANTY

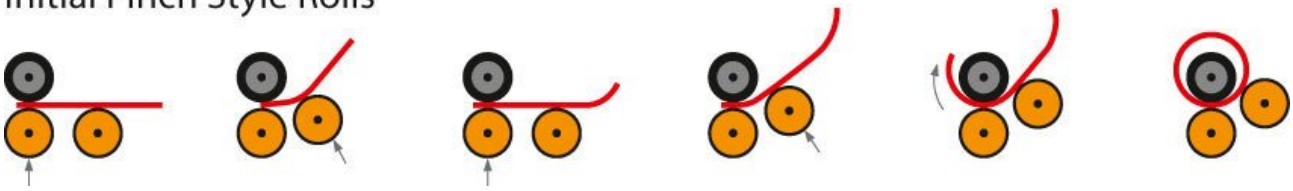
NO PLUG 415V

Features

- Initial pinch rolls with pre-bending
- Motorised up & down rear curving roll enables quick & easy pre-bending
- Digital readout display on rear curving roll position
- Mobile foot pedal control with digital readout display
- Two rolls are powered by reduction gearbox drive system
- Swing out top roller enables cone or cylinder to be removed
- Safety wire interlock system with emergency shut-off
- Rolls include wiring grooves
- Includes a conical bending guide roller

- Mild steel capacity is rated on hot rolled material with 250MPA

Initial Pinch Style Rolls



Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Product Brochure For S802

Specific Features


Right View



Rear View


Side View



Control Panel



Swing Out Top Roller


Motorised Up and Down Rear Curving Roller Left Side


Motorised Up and Down Rear Curving Roller Right Side


Hand Wheel For Material Thickness Adjustment


Swing Out Top Roller Handle


Top Swing Out Roller Micro Switch


Conical Bending Guide Roller


Wire Groove Rolls


Safety Wire Interlock System


Foot Control



Isolation Switch