Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Product Brochure For S806

Motorised Plate Curving Rolls - PR-252A

2550 x 2.5mm Mild Steel Capacity
Motorised Up/Down Rear Roll, DRO Control Panel & Initial Pinch Design



ORDER CODE:	S806
MODEL:	PR-252A
Curving System Type:	Initial Pinch
Curving Material Length (mm):	2550
Curving Plate Thickness - Mild Steel (mm):	2.5
Minimum Rolling Diameter (mm):	225
Roll Diameter (mm):	150
Motor Power (kW / hp):	2.2 / 3
Voltage / Amperage (V / amp):	415
Dimensions (LxWxH) (mm):	3080 x 740 x 1200
Floor Space (L x W x H) (mm):	~
Nett Weight (kg):	1875

METALMASTER

1 YEAR WARRANTY

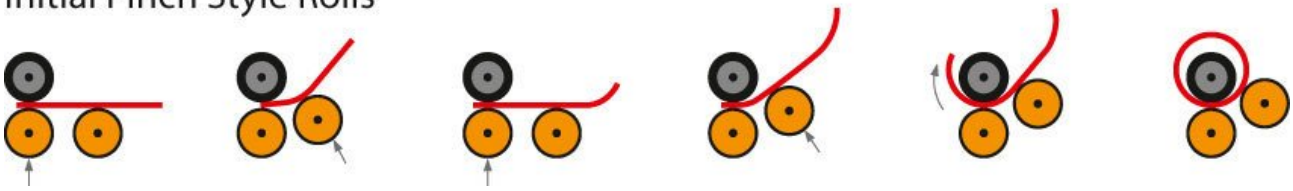
NO PLUG 415V

Features

- Initial pinch rolls with pre-bending
- Motorised up & down rear curving roll enables quick & easy pre-bending
- Digital readout display on rear curving roll position
- Mobile foot pedal control with digital readout display
- Two rolls are powered by reduction gearbox drive system
- Swing out top roller enables cone or cylinder to be removed
- Safety wire interlock system with emergency shut-off
- Rolls include wiring grooves
- Includes a conical bending guide roller

- Mild steel capacity is rated on hot rolled material with 250MPA

Initial Pinch Style Rolls



Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Product Brochure For S806

Specific Features


Right View


Rear View


Side View


Swing Out Top Roller Hand Shot




Control Panel


Swing Out Top Roller Handle



Top Swing Out Roller Micro Switch


Hand Wheel For Material Thickness Adjustment


Wire Groove Rolls


Motorised Up and Down Rear Curving Roller Left Side


Motorised Up and Down Rear Curving Roller Right Side


Conical Bending Guide Roller


Foot Control


Safety Wire Interlock System



Isolation Switch