

Product Brochure For S8892

Hydraulic CNC Pressbrake - APHS-41160

160T x 4100mm, 5 Axis, Delem DA58T Touch Screen Control

Includes Programmable X, Y1, Y2, V & R-Axis. CNC Table Crowning
 & Laser Guarding System



ORDER CODE:	S8892
MODEL:	APHS-41160
Control Unit (Type):	DELEM DA58T CNC
Nominal Pressure - Tonnage (Ton):	160
Nominal Pressure - Kilonewtons (kN):	1600
Length of Work Table (mm):	4100
Distance Between Columns (mm):	3550
Throat Depth (mm):	410
Maximum Open Height (mm):	530
Ram Stroke (mm):	260
Machine Axis (No.):	5
Safety Guarding System (Type):	Laser System
X Axis Backgauge Travel (mm):	750
R Axis Backgauge Travel (mm):	~
Z1 & Z2 Axis Back gauge fingers:	~
Table Bed Crowning System (Type):	CNC Controlled System
Motor Power (kW / hp):	15 / 20
Motor Voltage (V):	415
Floor Space (mm):	~
Nett Weight (kg):	12000



Description

Delem DA-58T CNC CONTROL UNIT

The DA-58T is a state of the art complete 2D graphical control solution for synchronized press brakes. Offering easiest CNC programming based on the Delem graphical touch screen user interface including automatic bend sequence calculation and collision detection.

Its 15" high resolution colour TFT, with industrial grade multi touch screen technology, gives access to the proven Delem user-interface. It enables direct navigation between product programming and actual production. Functions are directly located where needed, offering optimised ergonomics throughout the entire application.

Machine adjustment and test bends are reduced to a minimum with a quick and easy program-to-production work sequence. CNC programs are generated with a single touch. You are immediately ready to make the first part since all axes positions are automatically computed and the bend sequence has been simulated with machine and tools in real scale.

The production mode of the DA-58T helps the operator in graphically simulating the bend process of the product, guiding him during the press brake operation.

Features

- Baykal machine frames consist of a monolithic structure with hot rolled steel sheets of Fe 520 welded together. The two housings (shoulders) are obtained from the same sheet to ensure the same elasticity under stress. The ram and table are also obtained from Fe 520 steel sheets and are opportunely dimensioned to avoid deflection
- The hydraulic cylinders are manufactured from high resistance steel incorporating chromium plated & ground rods. Completed with lapped pistons to ensure longevity of the hydraulic seals
- The hydraulic unit is made by major companies in the field. It consists of electronically controlled proportional valves with independent closed loop control of the two cylinders.
- 5 CNC Controlled Axis (Y1, Y2, X, R, V) as standard. Multi Axis available
- Full electronic Synchronisation with proportional valve technology.
- German manufactured AKAS Laser Guarding System mounted at each end of machine ensuring correct interfacing and operator safety whilst in operation. Laser-safe is designed so each guard will slide up or down to allow for many different types and sizes of tooling enabling safety at the appropriate points as required by the Australian standards. Manual height adjustment with scales and lock for easy positioning.
- Sliding steel fabricated front sheet supports enabling a wide range of material sizes to be aligned and supported at the correct required width and height. This function is achieved by the precision linear guides mounted on the front apron parallel to the tooling length. This design can also be adjusted vertically to support material with return bends.
- Ram positions (Left & Right) are obtained from independent linear encoders whilst monitoring and adjusting proportional valves. This

Product Brochure For S8892

- produces a double closed loop system, with guaranteed beam positioning of +/- 0.01mm (Y1 and Y2 Axis)
- Electronic control of bending parallelism is via the Delem DA-58T CNC Control
- Accuracy is further ensured by mounting the linear encoders on a C-frame connected directly to the Bed, rather than the side frames. This ensures that deflection of the side frames and uneven loads have no effect on Beam position.
- CNC Controlled Back-gauge:- X-Axis stroke 750mm with DC motor mounted on hardened and machined guides, translation via spherical recirculating Ball screws
- Delem DA-58T CNC Control fully programmable with 2D graphics offline software included
- Precision linear scale measurement : HEIDENHAIN or GIVI MISURE
- Y1-Y2 - X-R CNC auto crowning table - controlled stroke axes
- CNC controlled hardened ballscrew backgauge with X-axis
- X axis range = 750mm speed = 350 mm/s max.
- 2 micrometric backgauge finger stops with lateral adjustment
- Front support arms fully adjustable mounted on linear rails x 2 off easy positioning over the complete working length of the machine
- Quality Siemens Electric control switch Gear is used
- Pendant control panel centralising all Press-Brake Functions
- Foot Pedal Control, Emergency stop buttons
- "X" axes stroke 750 mm
- "R" axes stroke 160 mm
- 4 micro adjustable fingers with 2D stops sliding all long the bar
- Hardening on fingers
- All movements on ball screws and ball guides
- AC servo brushless motors
- "X" axis speed of 350 mm/sec
- "R" axis speed 240 mm/sec
- Mechanical accuracy 0.1 mm
- Hydraulics: Hoerbiger & Parker (German & USA)
- Electrics: Siemens or Telemecanique (German or French)
- Scales: Misure or Heidenhain (Italian or Dutch)
- Tooling: Technostamp or Roller (Italian)
- Control: Delem DA-58T
- PLC: AKAS
- Mild steel capacity is rated on hot rolled material with 250MPA

Includes

- Delem DA-58T 2D Graphical CNC Control
- Y1-Y2 cylinder axis
- X - R Backgauge
- V - table crowning
- Quick release top tool clamping system
- AKAS Safety laser front guarding system

Specific Features




Rear Safety Guarding with Sliding Door



Laser Guarding System



CNC Table Crowning W Axis



Ball Screw Backgauge with Linear Guideways


Product Brochure For S8892




CNC Ball Screw Backgauge with R Axis




Backgauge Manual Fine Adjustment



Micro Adjustment Backstop



Flip up Backstop



Backstop Micro Adjustment Dial



Quick Action Intermediate Clamps



Sliding Front Sheet Supports on Linear Guideways



Front Sheet Support Height Adjustment



Mobile Foot Control



Machine Control Panel



Electrical Cabinet



Shown with Optional Ball Transfer Tables - Order Code (L840)

Product Brochure For S8892

Recommended Accessories

Q200

Combination Set

Q200A


Combination Set

Q201

Universal Bevel Protractor

M800

Rubber Mat - Anti-Fatigue

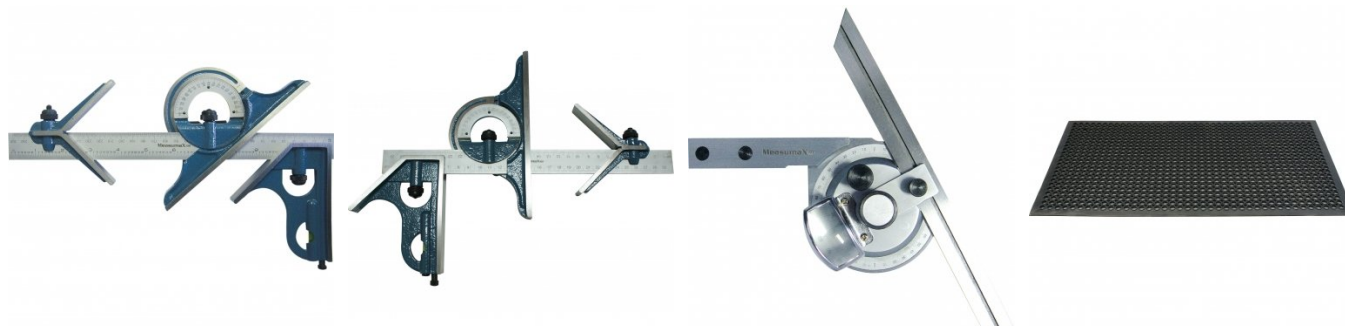

M805

Rubber Mat - Anti-Fatigue

O043

Rust & Corrosion Preventive

O042

General Purpose Lubricant & Corrosion Inhibitor

O040

Rust & Corrosion Preventive



Product Brochure For S8892

O044

Rust & Corrosion Preventive



O004

Superdraulic ISO 46 Hi Temp
Hydraulic Oil

