


## Product Brochure For S900G

### Hydraulic NC Pressbrake - PB-70E

70T x 2500mm - Includes Light Curtain Safety Guarding  
 Estun NC-E21 Control 2-Axis with Leadscrew Backgauge

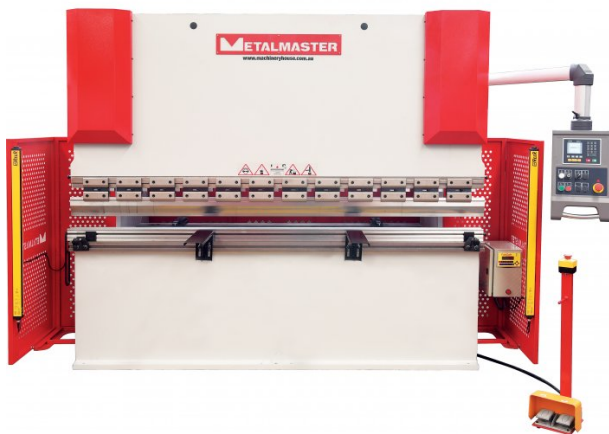

|  |                      |
|--|----------------------|
| ORDER CODE:                                | S900G                |
| MODEL:                                     | PB-70E               |
| Control Unit (Type):                       | Estun NC-E21         |
| Nominal Pressure - Tonnage (Ton):          | 70                   |
| Nominal Pressure - Kilonewtons (kN):       | 630                  |
| Length of Work Table (mm):                 | 2500                 |
| Distance Between Columns (mm):             | 2050                 |
| Throat Depth (mm):                         | 260                  |
| Maximum Open Height (mm):                  | 325                  |
| Ram Stroke (mm):                           | 90                   |
| Machine Axis (No.):                        | 2                    |
| Safety Guarding System (Type):             | Light Curtain System |
| Backgauge Travel (mm):                     | 520                  |
| Table Bed Crowning System (Type):          | -                    |
| Motor Power (kW / hp):                     | 7.5 / 10             |
| Motor Voltage (V):                         | 415                  |
| Floor Space Requirements (L x W x H) (mm): | 3100 x 1900 x 2500   |
| Nett Weight (kg):                          | 4400                 |



#### Description

Metalmaster Press brakes are designed and tested to provide precision bending capabilities demanded in industry. The main structural frames are constructed from rolled, stress relieved solid steel to prevent distortion during the bending process and under extreme continuous loads.

Featuring a heavy duty adjustable torsion bar with a positive stop system ensures consistent and accurate bending.

All electrical components are of European quality supplied by leading brands such as Siemens, Schneider, Telemecanique, Merlin Gerin and ABB.

Note: Guarding systems are required on pressbrakes for OHS compliance.

#### Features

- Hydraulic synchronised positive stop design, the ram stroke is controlled by a precision mechanical nut depth stop built into each cylinder, electronically controlled by Estun NC-E21 digital control assuring accuracy and repeatability.
- Mono-block steel frame design, welded, stress relieved and final machining ensures minimal bed deflection under load.
- Bending Parallelism is ensured by the oversize top beam and heavy duty torsion bar.
- Conveniently mounted control box on pendant for quick swivel and adjustments.
- Estun NC-E21 programmable digital control stores up to 40 unique programs with 25 automatic progressive bending steps in each individual program, assuring production accuracy & repeatability every time.
- Estun NC-E21 programmable leadscrew back gauge system, simply enter the desired measurement into the controller and press start, the back gauge then will move quickly into the position you have requested.
- Operator adjustable stroke open height & mute height switches enables increased productivity
- Adjustable bending pressure control allows the operator to quickly and accurately set the pressure required for different material. This user friendly system incorporates hydraulic overload protection.
- European style intermediate top tool clamping system, featuring an adjustable wedge clamping system for crowning as well as a safety key to stop the punch dropping when changing punch positions.
- Segmented heavy duty 35° offset top punch is segmented for selective bend width applications and offset for return bend clearance.
- Multi vee ('V') bottom die is made from one 2500mm solid die block design to handle heavy plate, safety edge vee ('V') is incorporated in bottom die block.
- Sliding front material sheet supports enabling a wide range of material sizes to be aligned and supported at the required height. This feature is achieved with a "T" slot machined down the total length of the die bed; sheet supports are also adjustable vertically to assist in supporting material with return bends already folded.
- Rear sliding safety gate with micro switch combined with access panels placed at each end of machine allows the operator to clearly view tooling and work piece during the bending operation, Metalmaster specially design gates to suit Australian safety requirements

## Product Brochure For S900G

- The vertical top beam slides are treated to provide greater wear resistance and increased accuracy.
- Mild steel capacity is rated on hot rolled material with 250MPA
- Pre-Commissioning:
  1. Press brake is run & tested prior delivery
  2. Hydraulic oil is included with machine

### Includes

- ESTUN NC- E21 control mounted on a swivel pendant for optimal ergonomics
- Adjustable front sheet support arms
- Emergency stop buttons strategically located on control panel and foot control
- Mobile dual operation foot control
- Segmented 35° offset top tooling
- Solid one piece four way multi vee (V) die block
- Top tooling tool intermediate holder system with wedge type adjustment
- Powered leadscrew back gauge with 520mm travel, operated by Estun NC-E21 control
- Oil tank level indicator
- Metal constructed safety guarding
- Integrated hydraulic system allowing rapid approach speed switching automatically to slow bend

### Specific Features



Right View




Enclosed Rear Safety Guarding



NC Estun E21 Controller



NC Estun E21



Top And Bottom Tooling



Intermediate Clamps



Adjustable Top Tool Taper Wedge System



Adjustable Front Sheet Supports



Tooling Bed Clamps



Safety Guarding



Estun NC E21 Control Ballscrew Backgauge



Estun NC E21 Control Ballscrew Backgauge 2

Product Brochure For S900G



Backgauge Stops




Synchronised Torsion Bar




Adjustable Pressure Control




Mobile Foot Control




Segmented Top Punch



One Piece 4 Sided Die



Tonnage Calculation Chart



Lubrication Chart

**Recommended Accessories**

S988

Quick Action Intermediate Clamps




S989

35° Top Punch Pressbrake Tooling




S9927

75mm Die Block Pressbrake Tooling



S996A

60mm Die Block Pressbrake Tooling



Product Brochure For S900G

S996B  
 60mm Die Rail Pressbrake  
 Tooling



Q200  
 Combination Set



Q200A  
 Combination Set



Q201  
 Universal Bevel Protractor



Q2105  
 Digital Height Gauge



M970  
 Digital Angle Rule



M972  
 Digital Angle Rule




M974  
 Digital Angle Rule



M800  
 Rubber Mat - Anti-Fatigue



M805  
 Rubber Mat - Anti-Fatigue



O000  
 SpillFix Universal Organic  
 Absorbent



O043  
 Rust & Corrosion Preventive



Product Brochure For S900G

O042

General Purpose Lubricant & Corrosion Inhibitor



O040

Rust & Corrosion Preventive



O044

Rust & Corrosion Preventive



O004

Superdraulic ISO 46 Hi Temp Hydraulic Oil

