

Product Brochure For T8323

M16 x 2.0mm - HSS Gun Tap

Metric Coarse Pitch

Ex GST


\$70.00

Inc GST

\$77.00



ORDER CODE:	T8319
Flute Type:	Gun Tap
d1 - Tap Size (Diameter) (Ø / mm):	M16
d2 - Shank Diameter (Ø / mm):	12.0
Pitch (TPI):	2.0mm
Pitch Type (TPI):	Course
Thread Form (Type):	Metric
Standard (DIN):	DIN 376
I1 - Length (mm):	110
I2 - Flute Length (mm):	~
I4 - Square Length (mm):	12.0
Square Across Flats (mm):	9.0
Drill Tapping Size (Diameter) (Ø / mm):	14.0

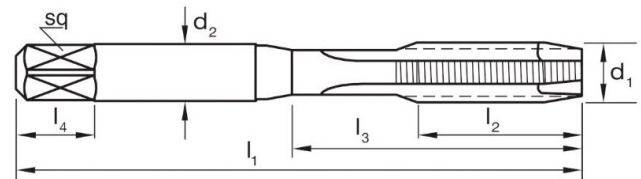

Description

Gun Nose / Spiral Point Taps

Engineered for fast, efficient production tapping of through holes, Gun Nose Taps —also known as Spiral Point Taps—combine excellent cutting performance, strength and long tool life.

Unlike standard straight flute taps, the spiral point design features an angled cutting face at the lead threads that drives chips forward and away from the cutting action. This reduces chip congestion and allows the tap to cut cleanly and continuously through the workpiece.

Manufactured from M35 High Speed Steel with 5% cobalt and finished with a TiCN wear-resistant coating, these taps are built to withstand demanding machining applications while maintaining excellent cutting performance. Precision-ground threads provide consistent, accurate thread forms, making them an excellent choice for repetitive and production tapping.

Features

- M35 High Speed Steel with 5% cobalt provides excellent hardness, heat resistance and durability for demanding tapping applications
- TiCN coating increases wear resistance and helps extend cutting-edge and overall tool life
- Spiral point / gun nose design drives chips forward and away from the cutting edge for fast, efficient through-hole tapping
- Precision-ground threads deliver accurate, clean and consistent thread forms
- Excellent shearing action reduces cutting resistance for smoother tapping and reduced driving power
- Strong flute design allows higher tapping speeds and provides excellent rigidity under production conditions
- Ideal for repetitive and production tapping where speed, accuracy and tool life are important
- Manufactured to DIN 371 Standard for consistent dimensions and performance



HSS
5% Cobalt

TiCN
Coating

Gun Tap

FAST • EFFICIENT • RELIABLE



GUN TAP DESIGN
Pushes swarf straight through the workpiece for uninterrupted cutting.




IDEAL FOR THROUGH HOLES
Continuous chip evacuation for faster, cleaner threads.



PREMIUM MATERIALS
HSS with 5% cobalt and TiCN coating for increased wear resistance and longer tool life.



USED IN
THROUGH
HOLES

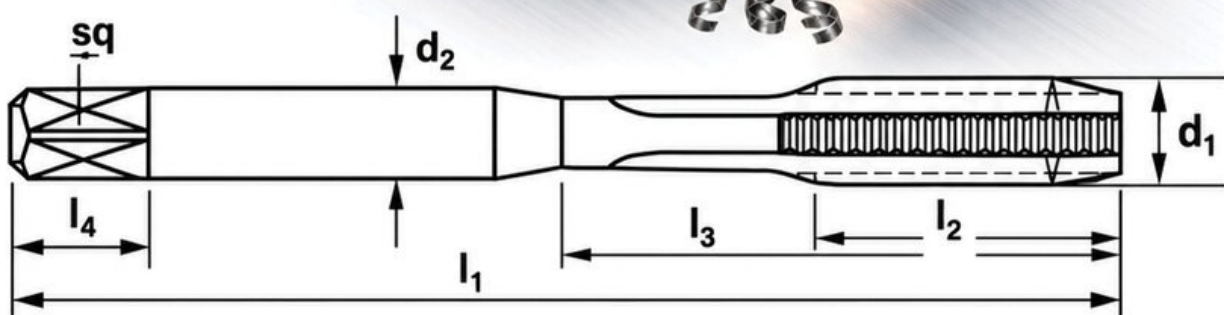d_1	l_1	l_2	l_3	l_4	d_2	sq
Thread Diameter	Overall Length	Thread Length	Flute Length	Square Length	Shank Diameter	Square Size

Product Brochure For T8323

Recommended Accessories

D1272

Metric 135° Precision HSS M35
COBALT Drill Set - 25 Piece



D1282

Imperial 135° Precision HSS
M35 COBALT Drill Set - 29
Piece



D1271

Metric 135° Precision - HSS M2
Jobber Drill Set - 25 Piece



D126

Metric 135° Precision HSS M35
COBALT Drill Set - 170 Pieces



T012

Metric Alloy Steel Tap & Die Set
- 32 Piece



T013

Metric HSS Tap & Die Set - 32
Piece



T014

Metric Alloy Steel Tap & Die Set
- 45 Piece



T015

Imperial Alloy Steel Tap & Die
Set - 45 Piece



Product Brochure For T8323

D508

HSS Industrial Centre Drill Set – 5Pcs



D1051

HSS Countersink Set (90° Cross Hole Type) - 4 Piece



D1061

HSS Countersink Set (90° 3 Flute Type) - 6 Piece



T004B

Tapping Chuck - Fixed



T005B

Tapping Chuck - Fixed



T004

Reversible Tapping Chuck - Adjustable Clutch



T005

Reversible Tapping Chuck - Adjustable Clutch

