

Product Brochure For ZC544


## Refrigerated Air Dryer - AMD-6

600L/min - (21cfm)

Suits Compressor with 4kW / 5.5HP



ORDER CODE:	ZC544
MODEL:	AMD-6
Flow Rate (CFM / LPM):	21 / 600
Flow Rate (L/sec):	10.00
Pressure Drop (bar):	0.04
Voltage (V):	240
Refrigerant Gas (Type):	~
Connections Ø (in-out):	1/2" BSP-F
A (mm):	370
B (mm):	515
C (mm):	475
D (mm):	~
E (mm):	~
F (mm):	~
G (mm):	~
Nett Weight (kg):	25

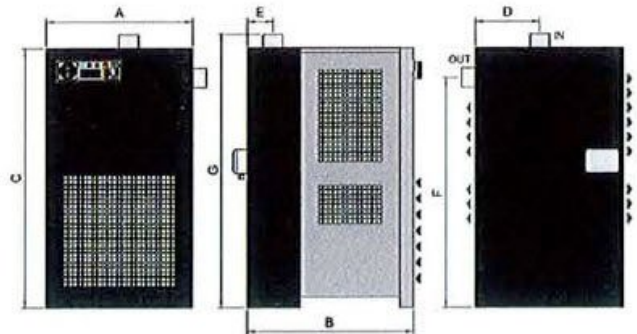

### Description

#### PERFORMANCE:

AMD dryer have excellent performance even in instances of high ambient temperatures up to 45°C and high inlet temperatures of 55°C, ensuring a reduced compressed air pressure drop.

#### FUNCTIONALITY:

operation of the AMD dryer is monitored by the DMC15 electronic controller which indicates the dew-point temperature digitally, it also controls the condensation drain valve via a timer and the condenser fan via a probe. A hot gas bypass valve allows the dryer to operate at part load and prevents the evaporator from freezing. The ALU-DRY aluminium module has a vertical flow layout ensuring the wet compressed air flows down to the automatic drain.

#### ECONOMY:

AMD dryer are sized to match standard air compressor outputs and therefore it is unnecessary to select a larger model. Air compressor dryer combinations have been tested and certified within operation limits shown in the technical feature brochure.

### Features

- Available for all size compressors
- Built for Australian conditions
- Ideal for where clean dry air is a must
- Complete with automatic condense drain
- Recommend use with 5 micron Pre-filter
- Certified quality systems ISO 9001

Product Brochure For ZC544

Specific Features



Front View



Rear View



Control Panel



Compliance Information