Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Product Brochure For A356

Swivel Crane - Truck or Ute - UTECRANE500

*800kg Lifting Capacity
12V - DC Lifting Winch



On Sale

	Ex GST	Inc GST
	~~$930.00~~	~~$1,023.00~~
	$890.00	$979.00


Order Code:	A356
MODEL:	UTECRANE500
Hydraulic Ram (Tonne):	~
Power Supply (V):	12
Single Line Lifting Capacity (kg):	500
Double Line Lifting Capacity (kg):	800
Lifting System (Type):	Electric Winch
Lift Capacity Pin Locations (Kg):	500, 250 & 100
Steel Box Section Size - Vertical Support (mm):	Ø86
Steel Box Section Size - Extension Arm Support (mm):	75 x 50
Max. Lift Height (Base to Lifting Shackle) (mm):	~
Min. Lift Height (Base to Lifting Shackle) (mm):	~
Overall Height - Boom at Lowest Position (mm):	1300
Nett Weight (kg):	64

Description

The CR500EL utility crane is lightweight, portable & compact design for mounting onto ute's, service bodies, vans, trucks, loading docks, platforms for lifting goods on and off up to 500kg with a single line lift via the powerful 12 volt DC winch.


Features

- *800kg capacity, when set up with double line lifting
- 500kg capacity, when set up with single line lifting
- 3 position telescoping boom : 500kg @ 930mm, 250kg @ 1180mm, 100kg @ 1430mm when set up with single line lifting
- Lifting electric winch: 12V DC 125amps
- 3 boom elevation angles: 3°, 20°, 40° raised manually
- 3.6m/min speed with no load & single line lift
- 360° continuous manual rotation of sealed thrust bearing
- Storage height folded (from base): 1300mm
- Lifting height (Base to hook): 1940mm
- 250 x 250 x 16mm mounting base plate with 170 x 170mm bolt holes centres
- Hand control with 4.2 metre cable
- Rotation hand lock
- Complies with Australian Standard AS1418.2
- Supplied with test certificate

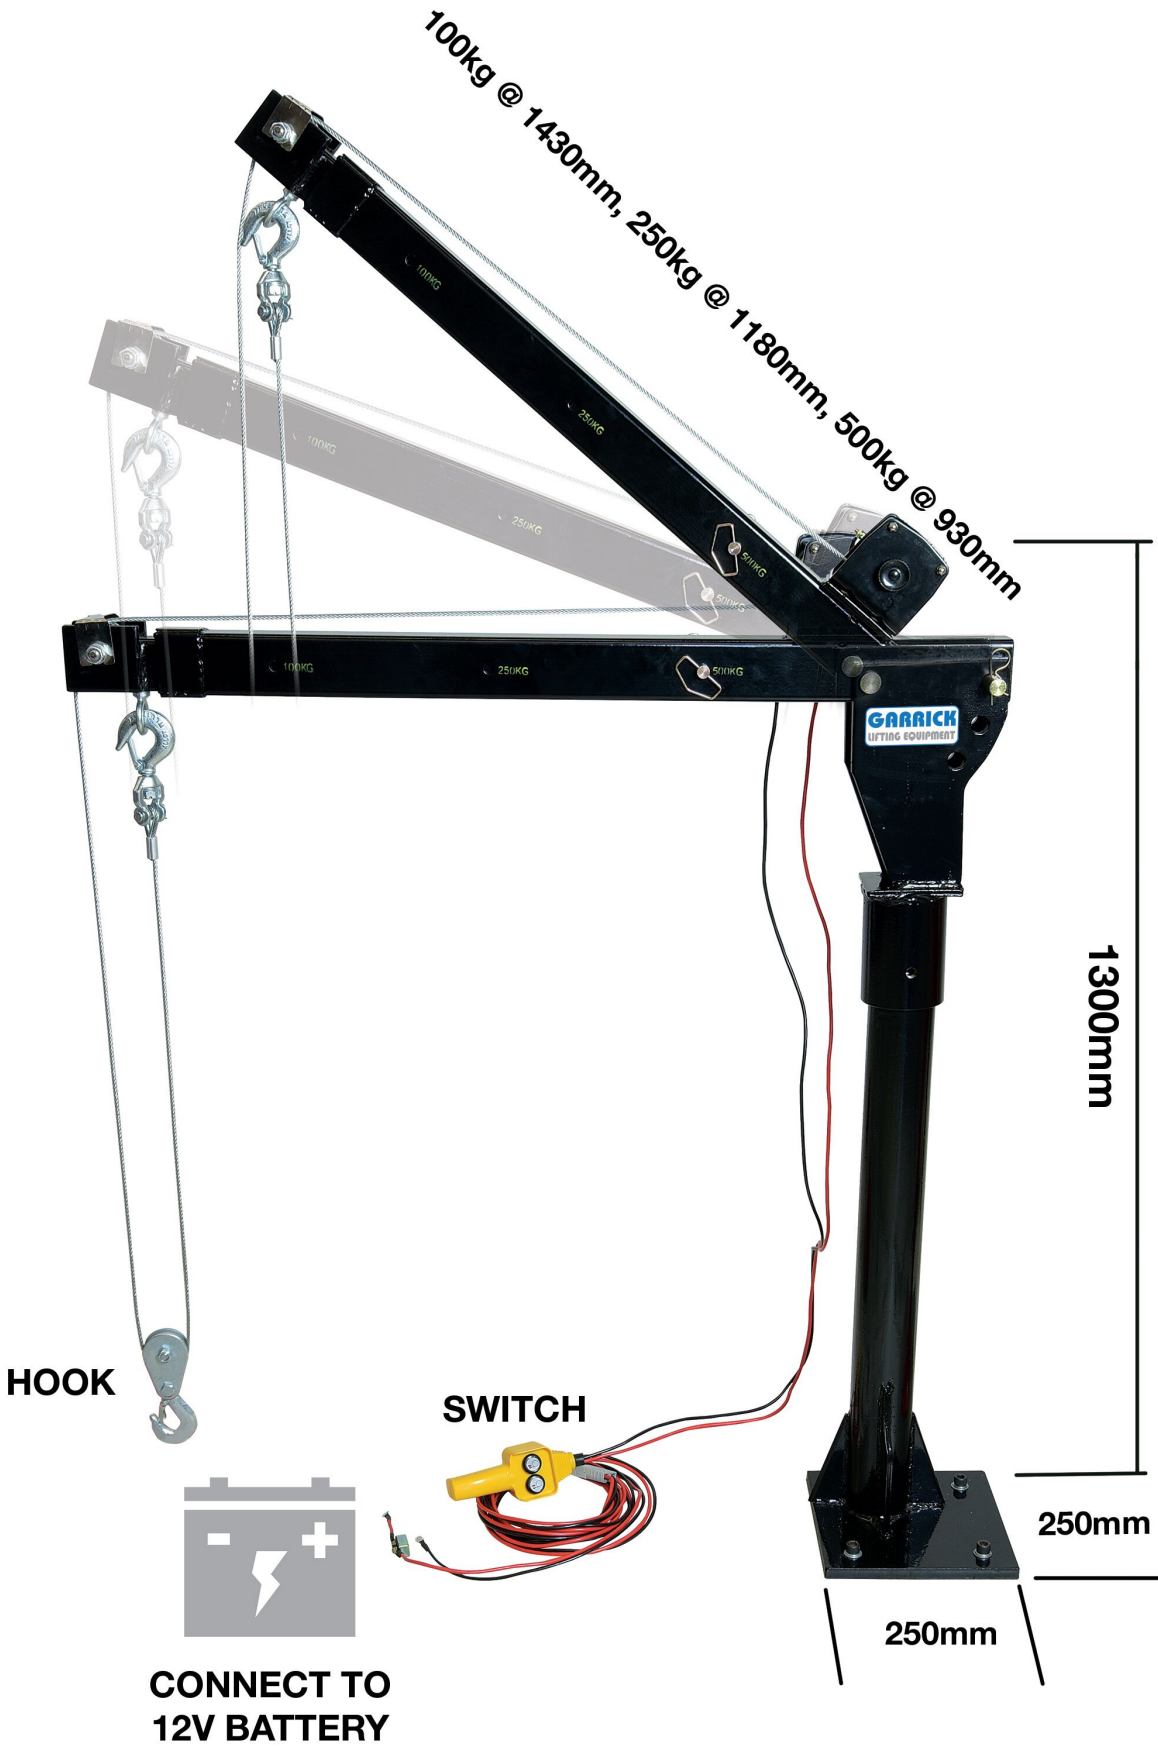
100kg @ 1430mm, 250kg @ 1180mm, 500kg @ 930mm
100KG
250KG
500KG
GARRICK
LIFTING EQUIPMENT
1300mm
250mm
250mm
HOOK
SWITCH
CONNECT TO
12V BATTERY

Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Specific Features



Overview


Setup as Double Line Lifting


Shown using Double Line Lift Lowest Pin Height Position


Shown using Double Line Lift Middle Pin Height Position


Shown using Double Line Lift Highest Pin Height Position


Shown using Double Line Lift Full Extended


Full Lowered


Full Lower Rear View



12V DC Winch


12V DC Winch Side View


12V DC Winch Rear View


Controller with 12V Leads


Switch


Hand Switch for Easy Control


Double Line Ring


Pulley

Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au


Hook with Pulley



3 Elevation Positions Via Pin Lock System Fully Down



3 Elevation Positions Via Pin Lock System Fully Up



3 x Telescopic Boom Positions 100kg 250kg and 500kg


Swivel Lock


Base

Recommended Accessories

H330
Self Locking Swivel Hook



H331
Self Locking Swivel Hook



H300
Round Sling



H305
Round Sling



Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

H307
Round Sling



H310
Round Sling



H312
Round Sling



H316
Flat Sling



H318
Flat Sling



H320
Flat Sling



H322
Flat Sling



H324
Flat Sling

