


## Product Brochure For C064

### 4MT Live Centre Set - Interchangeable Centring Tips



|                             |      |
|-----------------------------|------|
| ORDER CODE:                 | C064 |
| Taper (MT):                 | 4MT  |
| Maximum Speed (rpm):        | ~    |
| Maximum Load Capacity (kg): | ~    |
| ? Angle:                    | ~    |
| A:                          | ~    |
| B:                          | ~    |
| C:                          | ~    |
| D:                          | ~    |
| D1:                         | ~    |
| L:                          | ~    |
| Nett Weight (kg):           | 2.5  |

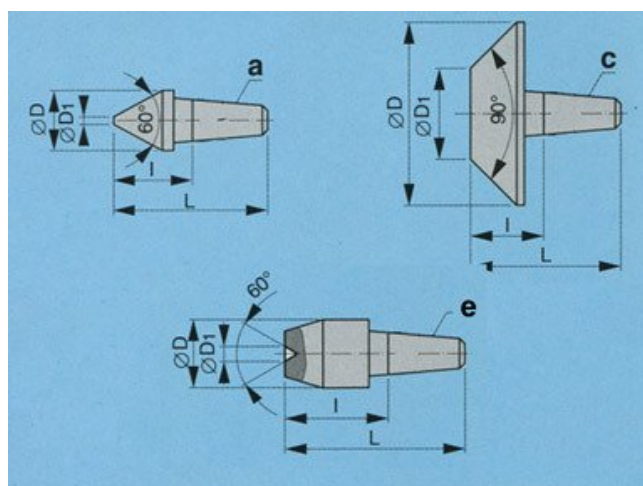

#### Description

Toolmaster high speed live centre set with interchangeable centres.

The body uses at the front a double row ball bearings and a thrust bearing with the main shaft supported at the other end with a needle roller bearing

#### Features

- Complete with 7 interchangeable points for various operations
- Supplied in plastic blow-mould case
- Body manufactured from SC45C tool steel hardened to HRC-60 and precision ground
- Maximum speed 3000rpm
- Concentric 0.0005mm

#### Includes

- 2 x A Type D=12.5mm L=32mm I=16mm
- 1 x A Type D=9.8mm L=38.6mm I=24mm
- 1 x A Type D=8mm L=38.6mm I=20mm
- 1 x A Type D=6mm L=38.6mm I=20mm
- 1 x C Type D=32mm D1=10mm L=40mm I=22mm
- 1 x E Type D=7.5mm L=32mm I=12mm