Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

Product Brochure For P6011


# 8 x 30mm Slotted Punch

Hi -Grade Tool Steel Imported From Japan
Ø30mm Locating Diameter

| Ex GST | Inc GST |
|---|---|
| $120.00 | $132.00 |



| | |
|---|---|
| ORDER CODE: | P6011 |
| Shape - Type: | Slotted Punch - 0P1 |
| Square or Slot Hole Size (W x L) (mm): | 8 x 30 |
| Punch Locating Diameter x Length (mm): | Ø30 x 70mm |
| Die Outside Body Diameter x Height (mm): | ~ |

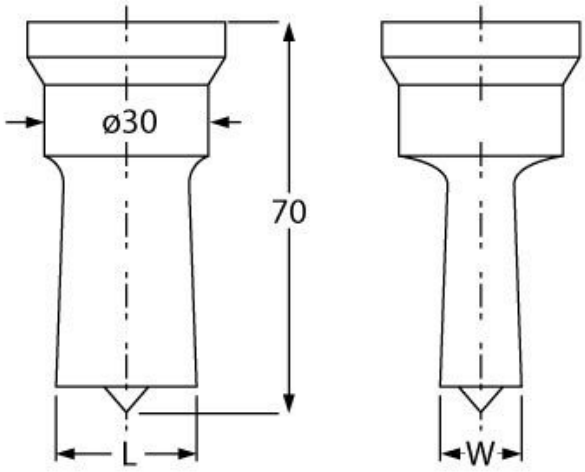


## Description

Punch and Dies are Manufactured by Sunrise in Taiwan using Hi -Grade Tool Steel imported from Japan.
The manufacturing process involves machining via hi tech CNC machines lathes & mills, vacuum heat treatment with multiple tempering at high temperatures before a final quality inspection/testing process all of which ensures an accurate, precise, durable & stable product.

## Features

- PLEASE NOTE FOLLOWING RECOMMENDATIONS WHEN SELECTING DIE CLEARANCE:

- Material Thickness - 2 ~ 4mm = Die Clearance 0.2mm
- Material Thickness - 4 ~ 9.5mm = Die Clearance 0.7mm
- Material Thickness - 10 ~ 14.5mm = Die Clearance 1.2mm
- Material Thickness - 15 ~ 19.5mm = Die Clearance 1.7mm
- Material Thickness - 20 ~ 24mm = Die Clearance 2.2mm

## Optional Accessories

- Please Note: Slotted punch requires a sleeve to fit on current Sunrise machines

- Models IW-45MQ. IW-45K, IW-60H requires (PP630A)
- Models IW-60S/SD, IW-80S/SD IW-100S/SD, IW-125S/SD, IW-165S/SD requires (PP630)

Sydney: (02) 9890 9111
Brisbane: (07) 3715 2200
Melbourne: (03) 9212 4422
Perth: (08) 9373 9999
Adelaide: (08) 9373 9969
sales@machineryhouse.com.au
www.machineryhouse.com.au

# Product Brochure For P6011

## Specific Features



Top View

## Recommended Accessories

PP630A
QUICK CHANGE ADAPTOR 30MM




PP630
QUICK CHANGE ADAPTOR 30MM



PP705
DIE REDUCING BUSH




PP0016
DIE RING SPACER

